

VI) With one half used, the other half is for 1-4 or 1-5 frequency are ex-  
 find, but the oscilla or  
 s. A vari, stas. Another  
 used as the speech an-  
 output between stage  
 oxide amp. in f. a  
 use. The speaker an-  
 of. The speaker an-  
 of. The speaker an-  
 of. The speaker an-

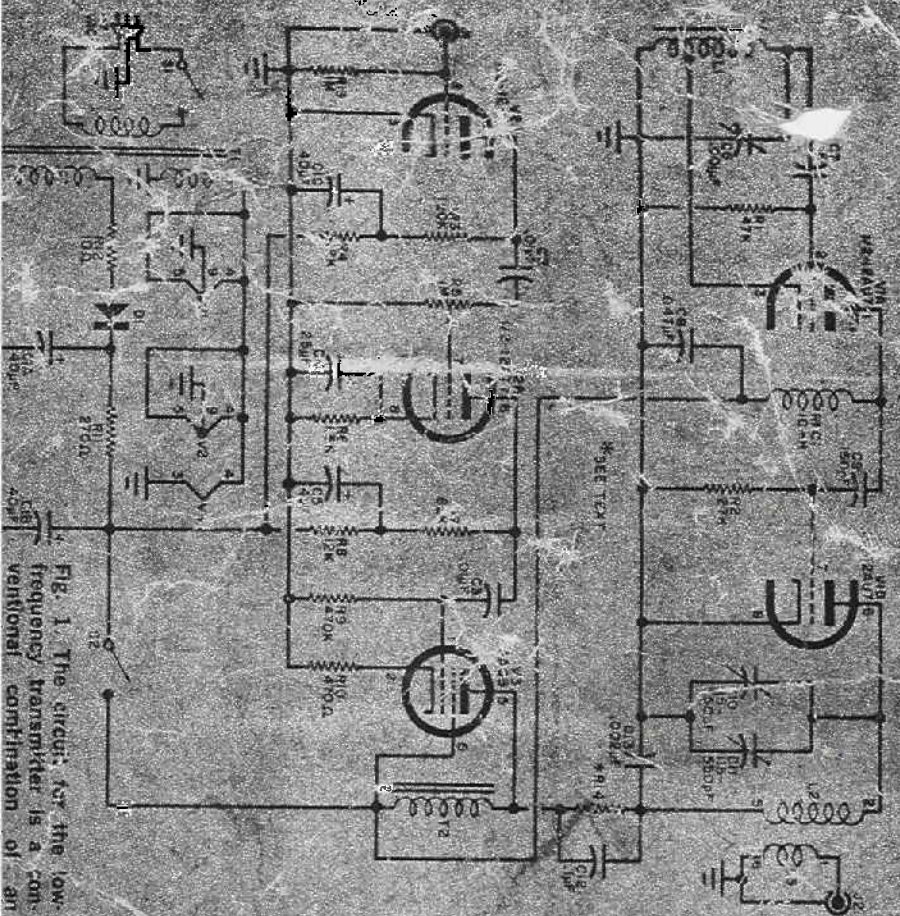


Fig. 1 The circuit for the low-frequency transmitter is a conventional combination of an





